



1. Connect the device to your pc by an USB cable, then power on the device.
2. Then you will get a removable disk named "BOOTDISK" on your pc, as below image shown.



3. Open this disk "BOOTDISK", and you will find a file named "READY.TXT".

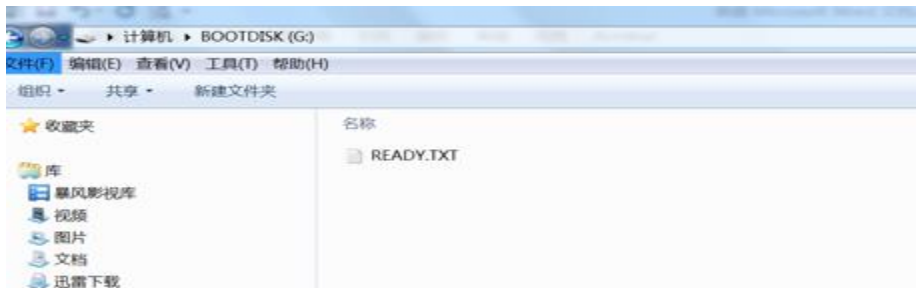

4. Copy the file **USERAPP.bin(or MERGE.bin or FW\_MERG.bin)** to this directory. (only one .bin file is allowed to be copied to this directly for each update process)
5. After that, you will see that the file's name will be changed to "SUCCESS.TXT" from "READY.TXT". It means that the **USERAPP.bin(or MERGE.bin or FW\_MERG.bin)** Update is successful.

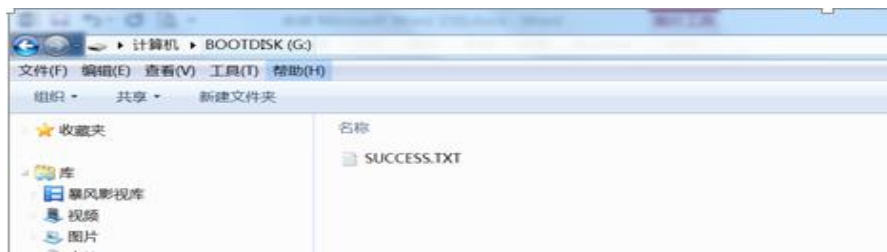

6. Get the device factory setting by RS232 command or web GUI page(, if the device has this function).